

Tyre size and maximum speed of the vehicle.
The maximum load capacity per axle (Load index).
Your style driving and road condition.

Only get trained people mounting and dismounting your tyres.

For safe drive, it is extremely important to drive with the right pressure.

Tread pattern
Unusual wear, tread groove separation, bulges.. etc.

Sidewall
Impact, Bulges, Ozone cracking, vehicle contact damage etc.

Pressure
The inflated pressure will be changed during long driving and changed circumstances temperature.



www.sd-international.com

Printed on Jun. 2021

PACE 
CAR TYRES

**TYRES YOU
CAN RELY ON
24/7**

2021
Products Manual

www.pace-tyres.com



WHY CHOOSE PACE

BRAND
INTRODUCTION



THE ADVANCED TECHNOLOGY

State of the art manufacturing facility, only opened in 2008. Design engineering from Europe, using the most up to date design technology available.



HIGH QUALITY PRODUCTS

All size tested & approved according to Regulation of (EU) No.2020/740 and registered by EPREL regarding Wet Grip ,Rolling Resistance, External Noise , Snow Grip & Ice Grip which Stipulated by Europe Union. Certification for each market are available.



PROFESSIONAL SERVICE

Full coverage of Quality Warranty and Products Liability Insurance. Exclusive distribution arrangements available. Direct factory program, ensuring regular, steady supply and competitive price. Full market support to develop your business. Over nearly 400 sizes already available, with many more to be introduced in near future. Professional customer service.



PC10



- Directional design with four optimized wide longitudinal grooves ensure water expulsion and precise steering on wet grip.
- High stiffness center rib can ensure straight-line performance and extremely improve response and stability when coming or change the lane.



Size	Loading Index	Speed	Max. Speed		Max. Pressure		Max. Load		Treadwear		
			Km/h	MPH	S(kpa)	S(psi)	S(kg)	S(lb)	U ¹	U ²	U ³
195/50R16	84	V	240	149	300	44	500	1102	C	B	71 B
205/50ZR16	87	W	270	168	300	44	545	1201	C	B	71 B
225/50ZR16	92	W	270	168	300	44	630	1389	B	B	71 B
205/45ZR16	87 XL	W	270	168	340	49	545	1201	C	B	72 B
245/45ZR17	99 XL	W	270	168	340	49	775	1709	B	B	72 B
205/40ZR17	84 XL	W	270	168	340	49	500	1102	C	B	72 B
245/40ZR17	95 XL	W	270	168	340	49	690	1521	B	B	72 B



M+S

ALL-WEATHER TYRES

OUTSTANDING EVERYWHERE



PC20



- Solid center rib designed for high-speed stability.
- Four deep grooves ensure fast water disposal and improve the handling on wet, snow and dry conditions.
- Separated by a narrow groove on shoulder areas ensure low rolling resistance and improved handling when turning.



Size	Loading Index	Speed	Max. Speed		Max. Pressure		Max. Load		Treadwear		
			Km/h	MPH	S(kpa)	S(psi)	S(kg)	S(lb)	U ¹	U ²	U ³
185/70R13	86	T	190	118	300	44	530	1168	C	B	70 B
205/70R15	96	H	210	130	300	44	710	1565	B	B	71 B
215/65R16	98	H	210	130	300	44	750	1653	B	B	71 B
195/60R14	86	H	210	130	300	44	530	1168	C	B	71 B
205/60R15	91	V	240	149	300	44	615	1356	B	B	71 B
175/55R15	77	H	210	130	300	44	412	908	C	B	70 B
185/55R15	82	V	240	149	300	44	475	1047	C	B	70 B
185/55R16	83	V	240	149	300	44	487	1074	C	B	70 B





ACTIVE 4S 

A high performance all season tyre with an asymmetric tread design, which has been optimized to provide superior comfort in dry or wet weather and light snow road condition.

- Multiple sipes across the tread enhance traction in all weather.
- Variable-pitching shoulders design allow for high stability and lower noise.
- A special silica-compound leads to increased tread mileage.



M+S

Size	Loading Index	Speed	Type	Tread Depth		Max. Speed	Icons		
				1/32"	mm	Km/h			
165/70R14	81	T	PCR	10.7	8.5	190	D	B	71 B
175/70R14	88 XL	T	PCR	10.7	8.5	190	D	B	71 B
155/65R14	75	T	PCR	10.7	8.5	190	D	B	71 B
175/65R14	82	T	PCR	10.7	8.5	190	D	B	71 B
185/65R15	88	H	PCR	10.7	8.5	210	D	B	71 B
195/65R15	91	H	PCR	10.7	8.5	210	D	B	72 B
215/65R16	102 XL	H	PCR	10.7	8.5	210	C	B	72 B
185/60R15	88 XL	H	PCR	10.7	8.5	210	D	B	71 B
195/60R15	88	H	PCR	10.7	8.5	210	D	B	72 B
205/60R16	96 XL	H	PCR	10.7	8.5	210	C	B	72 B
235/60R18	107 XL	V	PCR	10.7	8.5	240	C	B	72 B
185/55R15	82	H	PCR	10.7	8.5	210	D	B	71 B
195/55R15	85	H	PCR	10.7	8.5	210	D	B	72 B
195/55R16	87	H	PCR	10.7	8.5	210	D	B	72 B
205/55R16	91	V	PCR	10.7	8.5	240	C	B	72 B
215/55R16	97 XL	V	PCR	10.7	8.5	240	C	B	72 B
215/55ZR17	98 XL	W	PCR	10.7	8.5	270	C	B	72 B
225/55ZR17	101 XL	W	PCR	10.7	8.5	270	C	B	72 B
195/50R15	82	V	PCR	10.7	8.5	240	D	B	72 B
205/50ZR17	93 XL	W	PCR	10.7	8.5	270	D	B	72 B
225/50R17	98 XL	V	PCR	10.7	8.5	240	C	B	72 B
225/45R17	94 XL	V	PCR	10.7	8.5	240	C	B	72 B



ACTIVEPOWER 4S 

A non-directional all-season tyre for Van and light truck, total balance designing to combine with functions and performances.

- Optimized sipes improve excellent wet grip and traction on both hydroplaning and snow road surface.
- Large shoulder block provide strength and stiffness for outstand handling and braking while driving.
- Premium silica compound yields excellent wear and lower rolling-resistance in service.



M+S

Size	Ply	Loading Index	Speed	Type	Tread Depth		Max. Speed	Icons		
					1/32"	mm	Km/h			
195/70R15C	8PR/LRD	104/102	R	VAN	12.0	9.5	170	C	B	73 B
195/65R16c	8PR/LRD	104/102	R	VAN	12.0	9.5	170	C	B	73 B
205/65R16c	8PR/LRD	107/105	T	VAN	12.0	9.5	190	C	B	73 B
215/65R16c	8PR/LRD	109/107	T	VAN	12.0	9.5	190	C	B	73 B
225/65R16c	8PR/LRD	112/110	S	VAN	12.1	9.6	180	C	B	73 B
235/65R16c	8PR/LRD	115/113	R	VAN	12.2	9.7	170	C	B	73 B



M+S

WINTER TYRES

SNOW WITH PASSION

- 3D-SIPES DESIGN WITH SILICA COMPOUND
- MULTI-FLAT PROFILE AND WIDE TREAD DESIGN
- CERTIFIED MOUNTAIN-SNOWFLAKE
- NEARLY INTRODUCED STUDABLE WINTER TYRES IMPROVE DRIVING EXPERANCE ON SNOW AS WELL AS ICE



RUN-FLAT TYRES


- THE FOURTH-GENERATION CARCASS SUPPORT MATERIAL MAKES DRIVING MORE STABLE AND SAFER.
- THE UP-TO-DATE TREAD RUBBER FORMULA MAKES DRIVING MORE QUIET AND COMFORTABLE THAN ORDINARY TYRES.
- WHILE IMPROVING THE HANDLING, IT SEEKS FOR MORE OVERALL PERFORMANCE AND DURABILITY AS A RUN-FLAT TYRE.



ALVENTI

IMPERO M+S

Surpassing international test standards, each pace run-flat tyre ensures a continuous safe driving of over 120 kilometers at a speed of 80 kilometers per hour under zero pressure.

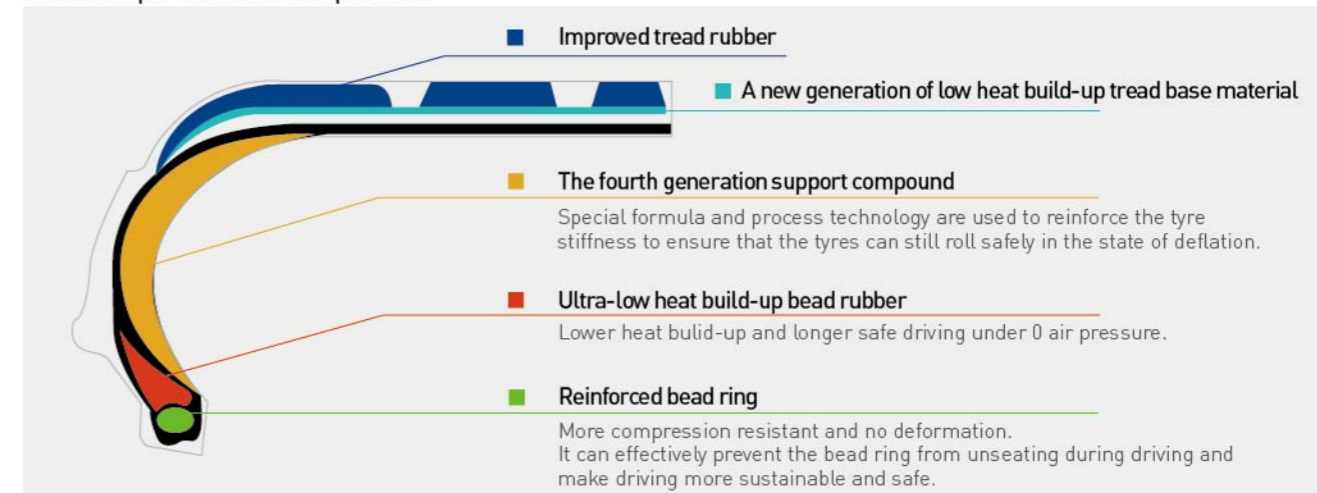

PACE Run-flat Tyre Specifications:

Size	Pattern Code	Loading Index	Speed	Max. Speed		Max. Pressure		Max. Load		D	B	S (lb)
				Km/h	MPH	S (kpa)	S (psi)	S (kg)	S (lb)			
205/60ZRF16 RFT	Alventi	92	W	270	168	300	44	630	1389	D	B	71 B
195/55RF16 RFT	Alventi	87	V	240	149	300	44	545	1201	D	B	71 B
205/55ZRF16 RFT	Alventi	91	W	270	168	300	44	615	1356	D	B	71 B
225/55ZRF16 RFT	Alventi	95	W	270	168	300	44	690	1521	D	B	71 B
205/55RF17 RFT	Alventi	91	V	240	149	300	44	615	1356	D	B	71 B
225/55ZRF17 RFT	Alventi	97	Y	300	186	300	44	730	1609	D	B	71 B
205/50ZRF17 RFT	Alventi	89	W	270	168	300	44	580	1279	D	B	71 B
225/50ZRF17 RFT	Alventi	94	W	270	168	300	44	750	1653	D	B	71 B
205/45ZRF17 RFT	Alventi	88 XL	W	270	168	340	49	560	1235	D	B	72 B
225/45ZRF17 RFT	Alventi	94 XL	W	270	168	340	49	670	1477	D	B	72 B
225/45ZRF18 RFT	Alventi	91	Y	300	186	300	44	615	1356	D	B	71 B
245/45ZRF18 RFT	Alventi	96	Y	300	186	300	44	810	1786	D	B	71 B
255/45ZRF18 RFT	Alventi	103 XL	Y	300	186	340	49	875	1929	D	B	73 B
225/45ZRF19 RFT	Alventi	92	W	270	168	340	49	710	1565	D	B	71 B
235/45RF19 RFT	Alventi	95	V	240	149	300	44	690	1521	D	B	71 B
245/45ZRF19 RFT	Alventi	102 XL	Y	300	186	340	49	850	1874	D	B	72 B
255/45ZRF19 RFT	Alventi	105 XL	W	270	168	340	49	925	2039	D	B	73 B
215/40ZRF18 RFT	Alventi	85	Y	300	186	300	44	515	1135	D	B	71 B
225/40ZRF18 RFT	Alventi	92 XL	Y	300	186	340	49	630	1389	D	B	72 B
245/40ZRF18 RFT	Alventi	93	Y	300	186	300	44	650	1433	D	B	71 B
255/40ZRF18 RFT	Alventi	95	W	270	168	300	44	690	1521	D	B	72 B
225/40ZRF19 RFT	Alventi	93 XL	Y	300	186	340	44	650	1433	D	B	72 B
245/40ZRF19 RFT	Alventi	98 XL	Y	300	186	340	49	750	1653	D	B	72 B
255/40ZRF19 RFT	Alventi	100 XL	Y	300	186	340	49	800	1764	D	B	73 B
275/40ZRF19 RFT	Alventi	101	Y	300	186	300	44	825	1819	D	B	72 B
245/40ZRF20 RFT	Alventi	99 XL	Y	300	186	340	49	775	1709	D	B	72 B
255/35ZRF18 RFT	Alventi	90	Y	300	186	300	44	600	1323	D	B	72 B
255/35ZRF19 RFT	Alventi	96 XL	Y	300	186	340	49	710	1565	D	B	73 B
275/35ZRF19 RFT	Alventi	100 XL	Y	300	186	340	49	800	1764	D	B	73 B
275/35ZRF20 RFT	Alventi	102 XL	Y	300	186	340	49	850	1874	D	B	73 B
235/55ZRF18 RFT	Impero	100	W	270	168	300	44	800	1764	D	B	71 B
255/55RF18 RFT	Impero	109 XL	V	240	149	340	49	1030	2271	D	B	73 B
235/55RF19 RFT	Impero	101	V	240	149	300	44	825	1819	D	B	71 B
225/50ZRF18 RFT	Impero	95	W	270	168	300	44	690	1521	D	B	71 B
235/50ZRF18 RFT	Impero	101 XL	W	270	168	340	49	825	1819	D	B	72 B
245/50ZRF18 RFT	Impero	100	Y	300	186	300	44	800	1764	D	B	71 B
245/50ZRF19 RFT	Impero	105 XL	W	270	168	340	49	925	2039	D	B	72 B
255/50ZRF19 RFT	Impero	103	W	270	168	300	44	875	1929	D	B	72 B
275/40ZRF20 RFT	Impero	106 XL	W	270	168	340	49	950	2094	D	B	73 B
315/35ZRF20 RFT	Impero	110 XL	W	270	168	340	49	1060	2337	D	B	75 B